

YANTON®

PROFESSIONAL FM TRANSCEIVER

**TRI BAND
DUAL DISPLAY
DUAL STANDBY**

T-UV2D

Tri-Band FM Transceiver





Tri-color backlit selectable

- 128*2 groups channels storage
- LED Flash light
- Voice Compander
- Scrambler Function
- PTT & ANI ID
- DTMF encoder & decoder

YANTON® | T-UV2D

TRI BAND · DUAL DISPLAY · DUAL STANDBY

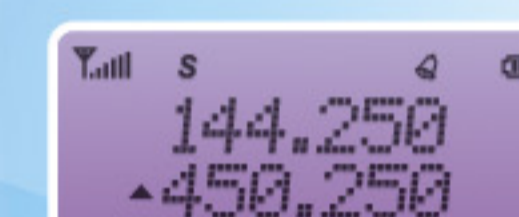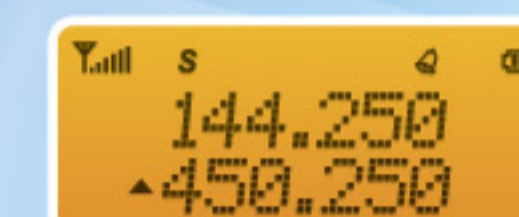

Tri-color backlit selectable

- 128*2 groups channels storage
- LED Flash light
- Voice Compander
- Scrambler Function
- PTT & ANI ID
- DTMF encoder & decoder

SPECIFICATION

GENERAL		TRANSMIT PART	
Frequency Range	VHF: 136~174MHz	RF Power	4W/5W
	UHF: 400~480MHz	Modulate Mode	F3E
Operating Temperature	-20°C~+60°C	Max. Freq. Deviation	≤5KHz
Frequency Combination	Phase lock frequency synthesize	Remain Wave Radiation	<-60dB
Frequency Stability	±2.5ppm	Transmitting Current	≤1000mA
Memory Channel	199 Channels	RECEIVE PART	
Working voltage	DC7.4V (Li-ion Battery)	Sensitivity	<0.20μV(12dB SINAD)
Antenna Impedance	50Ω	Squelch Sensitivity	<0.20μV
Operating Mode	Simplex of co-frequency or alien frequency	Intermodulation Antijamming	50dB
Dimension	58mm×110mm×32mm	Audio Power output	500mW
Weight	130g (Include Battery Pack)	Receiving Current	≤100mA
		Squelch Standby	20mA

Notice: Saving your presence, no additional notice will be sent if specification changes because of technology-improving.